



0,5 mm



Betongrå



● 27 x 11 mm



● 9 mm



20 x 600 x 2400/3000 mm (+/- 2 mm)



13 mm



1,44 m²




8,6/10,8 kg (+/- 10%)


Passande FJORDWALL-tillbehör:

- Monteringskruvar 4,5 x 45 mm, svarta
- Monteringslim 290 ml


Figur 1:

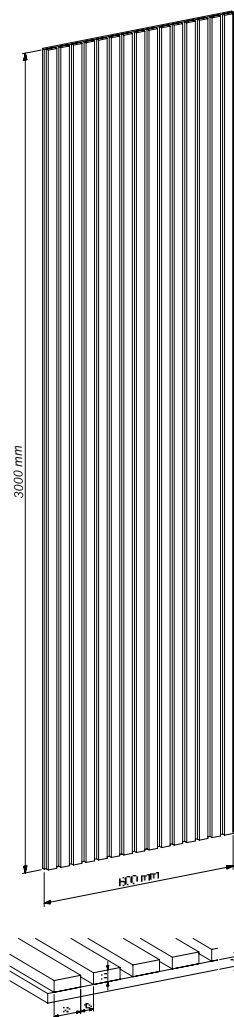

Figur 2:

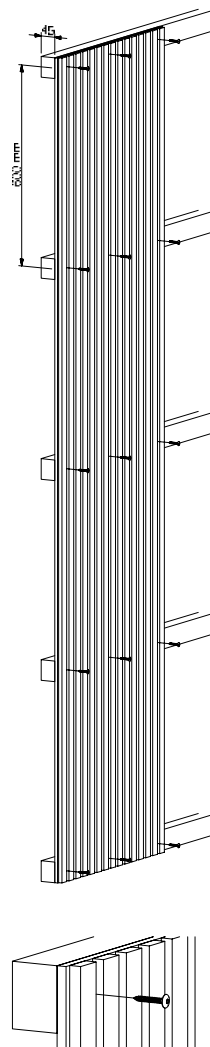


Frequency [Hz]	α_s
100	0.09
125	0.22
160	0.30
200	0.53
250	0.56
315	0.87
400	0.99
500	1.97
630	0.97
800	1.02
1k	1.02
1.25k	0.91
1.6k	0.90
2k	0.87
2.5k	0.80
3.15k	0.81
4k	0.77
5k	0.71

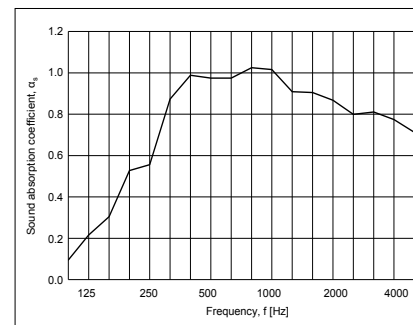

Ljudtest Figur 3:
 Montering: 45 mm luftavstånd bakom panelen.
 Stängd ram runt kanten.

Testområde:: 10,8 m²
 Rumsvolym: 215 m³
 Rymyta: 305 m²

Frequency [Hz]	α_s
100	0.02
125	0.02
160	0.02
200	0.05
250	0.05
315	0.11
400	0.16
500	0.26
630	0.32
800	0.46
1k	0.63
1.25k	0.78
1.6k	0.97
2k	1.11
2.5k	1.05
3.15k	0.88
4k	0.75
5k	0.68

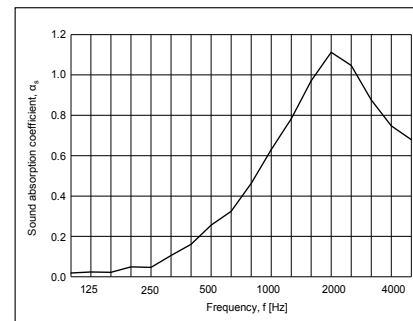

Ljudtest Figur 4:
 Montering: De 11 panelerna ligger platt på
 betonggolvet i ekotestrummet.
 Stängd ram runt kanten.

Testområde: 10,8 m²
 Rumsvolym: 215 m³
 Rymyta: 305 m²