



0,5 mm



Sand Grå



Sort



Indigo Blå



Arktisk Grå



Hvid/Hvid



Hvid/Sort



Lysegrå



Lys Eg



Brun Eg



Mørk Eg



Grå Eg



Valnød



● 27 x 11 mm



● ○ 9 mm



20 x 600 x 2400 (+/- 2 mm)



13 mm



1,44 m²




10,2 (+/- 10%)


Passende FJORDWALL tilbehør:

- Montageskruer 4,5 x 45 mm. sort/hvid
- Montagelim 290 ml.


Figur 1:

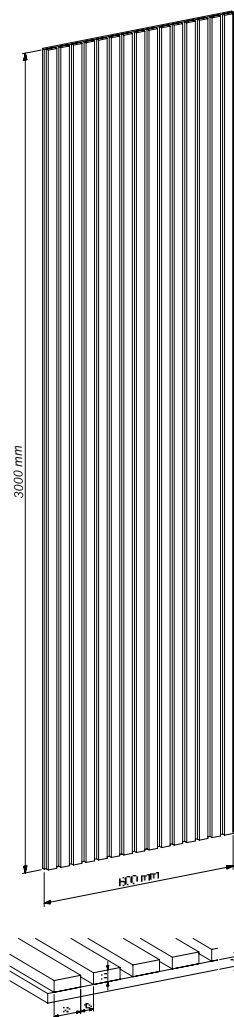

Figur 2:

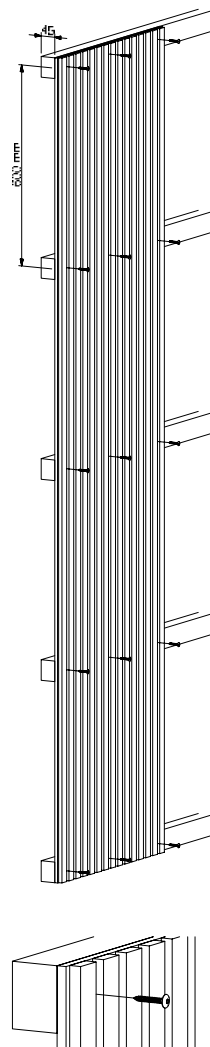

Frequency [Hz]	α_s
100	0.09
125	0.22
160	0.30
200	0.53
250	0.56
315	0.87
400	0.99
500	1.97
630	0.97
800	1.02
1k	1.02
1.25k	0.91
1.6k	0.90
2k	0.87
2.5k	0.80
3.15k	0.81
4k	0.77
5k	0.71

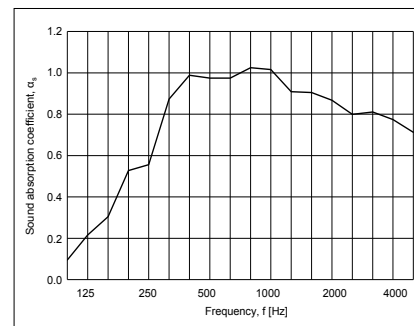


Lydstest Figur 3:

Montage: afstand 45 mm luft bag panelet.
Lukket ramme omkring kant.

Testareal: 10,8 m²
Rum-volumen: 215 m³
Rum-overflade areal: 305 m²

Frequency [Hz]	α_s
100	0.02
125	0.02
160	0.02
200	0.05
250	0.05
315	0.11
400	0.16
500	0.26
630	0.32
800	0.46
1k	0.63
1.25k	0.78
1.6k	0.97
2k	1.11
2.5k	1.05
3.15k	0.88
4k	0.75
5k	0.68

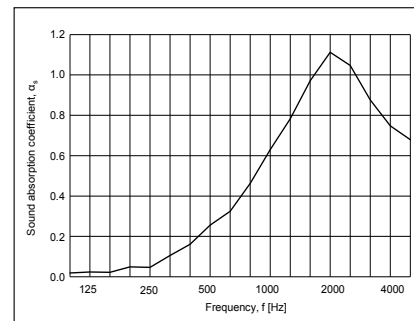

Lydstest Figur 4:

Montage: De 11 paneler ligger fladt på betongulv i ekkotest-rummet.
Lukket ramme omkring kant.

Testareal: 10,8 m²
Rum-volumen: 215 m³
Rum-overflade areal: 305 m²