



0,5 mm



Sort



Askegrå



Bordeaux



Koksgrå



Creme



Rød



Brun



Mørkegrøn



Lysegrå



Stengrå



Støvet Grå



Skifergrå



Blå



Turkis



Koboltblå



Neon Grøn



Mint



Olive



Pudderrosa



Orange



● 27 x 11 mm



● 9 mm



20 x 600 x 2400/3000 mm
(+/- 2 mm)



13 mm



1,44 m²




10,8/12,8 kg (+/- 10%)


Passende FJORDWALL tilbehør:

- Montageskruer 4,5 x 45 mm. sort
- Montagelim 290 ml.


Figur 1:

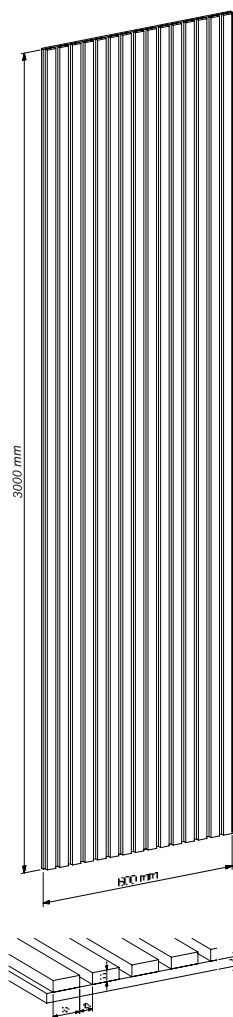

Figur 2:

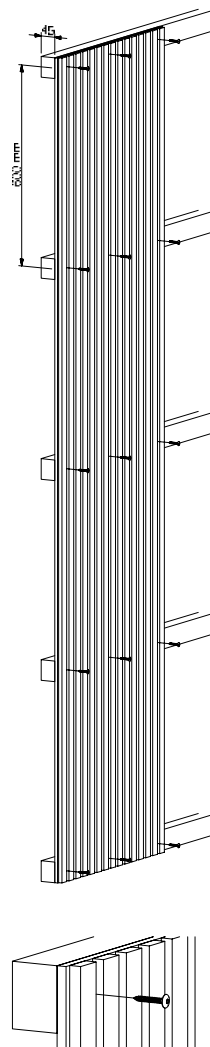

Frequency [Hz]	α_s
100	0.09
125	0.22
160	0.30
200	0.53
250	0.56
315	0.87
400	0.99
500	1.97
630	0.97
800	1.02
1k	1.02
1.25k	0.91
1.6k	0.90
2k	0.87
2.5k	0.80
3.15k	0.81
4k	0.77
5k	0.71

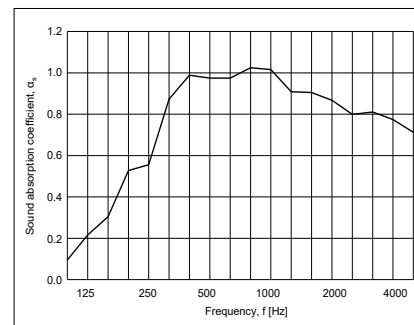


Lydstest Figur 3:

Montage: afstand 45 mm luft bag panelet.
Lukket ramme omkring kant.

Testareal: 10,8 m²
Rum-volumen: 215 m³
Rum-overflade areal: 305 m²

Frequency [Hz]	α_s
100	0.02
125	0.02
160	0.02
200	0.05
250	0.05
315	0.11
400	0.16
500	0.26
630	0.32
800	0.46
1k	0.63
1.25k	0.78
1.6k	0.97
2k	1.11
2.5k	1.05
3.15k	0.88
4k	0.75
5k	0.68

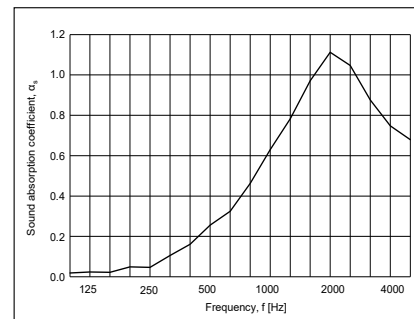

Lydstest Figur 4:

Montage: De 11 paneler ligger fladt på betongulv i ekkotest-rummet.
Lukket ramme omkring kant.

Testareal: 10,8 m²
Rum-volumen: 215 m³
Rum-overflade areal: 305 m²