



0,5 mm



Ask



Eg



Røget Eg



Valnød



Eg Grå Filt



Grå Eg



Olieret Eg



Olieret Valnød



Bøg



Rustik Eg



Sort Olieret Eg



Mahogni



27 x 11 mm



9 mm



20 x 600 x 2400 mm (+/- 2 mm)



13 mm



1,44 m²





14,2 kg (+/- 10%)

Passende FJORDWALL tilbehør:


- Montageskruer 4,5 x 45 mm. sort, grå
- Montagelim 290 ml.

Montage

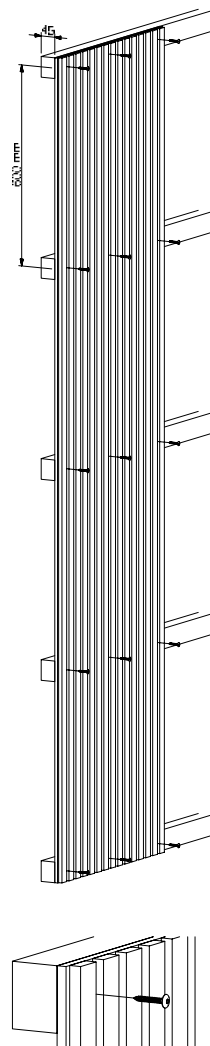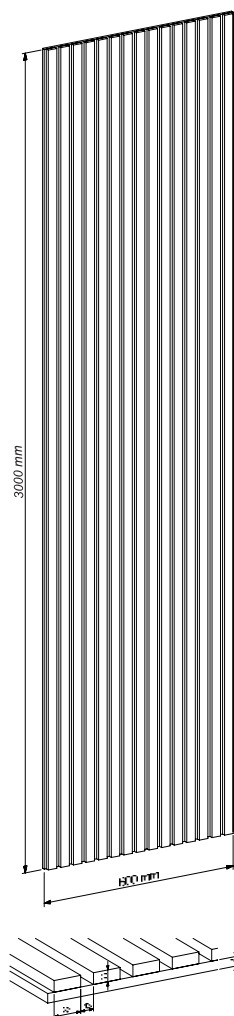

Akustik

Frequency [Hz]	α_s
100	0.09
125	0.22
160	0.30
200	0.53
250	0.56
315	0.87
400	0.99
500	1.97
630	0.97
800	1.02
1k	1.02
1.25k	0.91
1.6k	0.90
2k	0.87
2.5k	0.80
3.15k	0.81
4k	0.77
5k	0.71

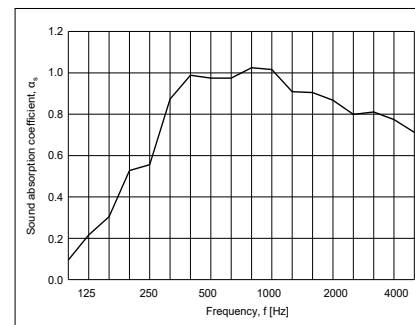


Lydstest Figur 3:

Montage: afstand 45 mm luft bag panelet.
Lukket ramme omkring kant.

Testareal: 10,8 m²
Rum-volumen: 215 m³
Rum-overflade areal: 305 m²

Frequency [Hz]	α_s
100	0.02
125	0.02
160	0.02
200	0.05
250	0.05
315	0.11
400	0.16
500	0.26
630	0.32
800	0.46
1k	0.63
1.25k	0.78
1.6k	0.97
2k	1.11
2.5k	1.05
3.15k	0.88
4k	0.75
5k	0.68

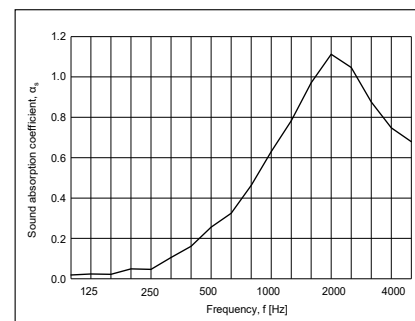

Lydstest Figur 4:

Montage: De 11 paneler ligger fladt på betongulv i ekkotest-rummet.
Lukket ramme omkring kant.

Testareal: 10,8 m²
Rum-volumen: 215 m³
Rum-overflade areal: 305 m²