



0,5 mm



Svart



Askgrå



Bordeaux



Kolgrå



Kräm



Röd



Brun



Mörkgrön



Ljusgrå



Stengrå



Dammsgrå



Mörkgrå



Blå



Turkos



Koboltblå



Neongrön



Mintgrön



Olivgrön



Pudderrosa



Orange



27 x 11 mm



9 mm



20 x 600 x 2400/3000 mm
(+/- 2 mm)



13 mm



1,44 m²




10,8/12,8 kg (+/- 10%)


Passande FJORDWALL tillbehör:

- Monteringskruvar 4,5 x 45 mm, svarta
- Monteringslim 290 ml


Figur 1:

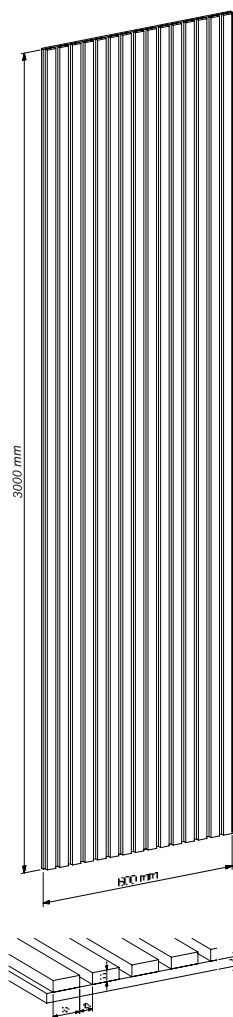

Figur 2:

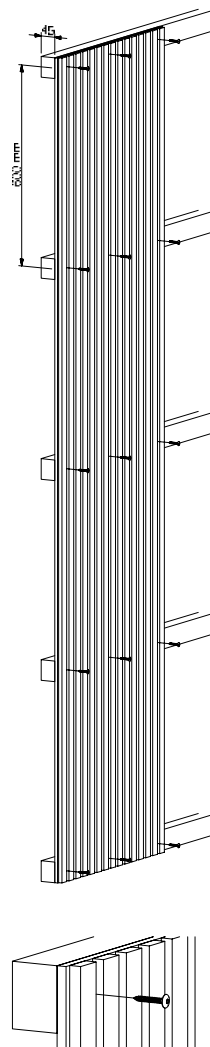


Frequency [Hz]	α_s
100	0.09
125	0.22
160	0.30
200	0.53
250	0.56
315	0.87
400	0.99
500	1.97
630	0.97
800	1.02
1k	1.02
1.25k	0.91
1.6k	0.90
2k	0.87
2.5k	0.80
3.15k	0.81
4k	0.77
5k	0.71

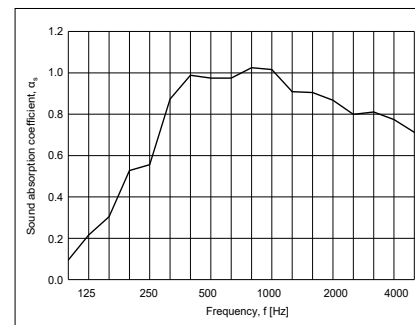

Ljudtest Figur 3:
 Montering: 45 mm luftavstånd bakom panelen.
 Stängd ram runt kanten.

Testområde:: 10,8 m²
 Rumsvolym: 215 m³
 Rymyta: 305 m²

Frequency [Hz]	α_s
100	0.02
125	0.02
160	0.02
200	0.05
250	0.05
315	0.11
400	0.16
500	0.26
630	0.32
800	0.46
1k	0.63
1.25k	0.78
1.6k	0.97
2k	1.11
2.5k	1.05
3.15k	0.88
4k	0.75
5k	0.68

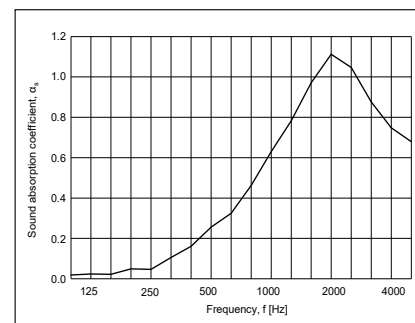

Ljudtest Figur 4:
 Montering: De 11 panelerna ligger platt på
 betonggolvet i ekotestrummet.
 Stängd ram runt kanten.

Testområde: 10,8 m²
 Rumsvolym: 215 m³
 Rymyta: 305 m²